



Art.-No.: 6.5185.0610
 6.5185.0910
 6.5185.1210
 6.5185.1910
 6.5185.2510

5185

High Strength Acrylic Mounting Tape

Characteristics


A reinforced acrylic foam tape with high tack and shear strength performance acrylic adhesives.

Excellent resistance to solvent, chemical, UV and heat, making the tape bond securely to a very wide range of substrates.

Ideal for bonding emblems, nameplates and metal.

Technical Data

Carrier	Acrylic foam base in clear
Release Liner	Red HDPE
Adhesive	High Tack Acrylic (Solvent Based)
Thickness	0.5mm and 1.00mm (+/- 0.05mm)
Width	6mm, 9mm, 12mm, 19mm and 25mm (+/- 1mm)
Length	10m (+/- 0.1m)
Peel Adhesion	PSTC-3 2.8kgs/25mm
Shear Adhesion	PSTC-7 over 72 hours with 2kg on 25mm x 25mm at 25°C
Tensile Strength	Over 50kgs/25mm x 25mm
Heat Resistance	PSTC-9 over 24 hours with 1kg on 25mm x 25mm at 80°C
Service Temp	-40°C to 170°C
Application Temp	-10°C to 150°C

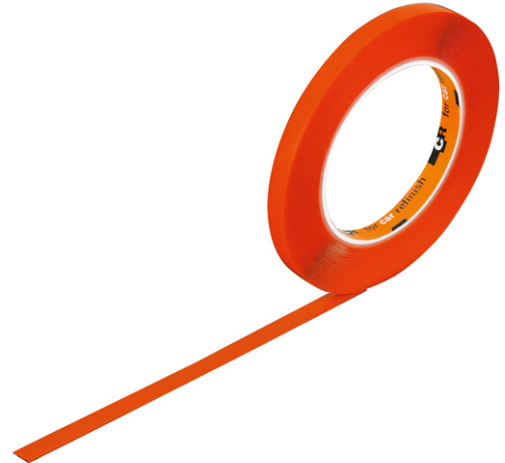

Storage and Transportation

Storage only in clean, dry and well-ventilated areas.
 Storage temperature 10 ° C to 30 ° C.
 Under these conditions, a shelf life of at least 12 months